

SMP TM1

Precautions:

Do not cover the vents on the back of the monitor.
Do not expose the monitor to direct sunlight, heat, water or moisture.
Make sure the monitor stand is securely and securely attached.


Package contents:

1. 4.3 "monitor
2. Power cord
3. Instructions for use

Features and specifications

Digital color TFT monitor
2 AV inputs for rear and front view or side cameras
Brightness contrast, color and language can be adjusted manually with the "menu" and "+/-" buttons on the back of the monitor
Screen: 4.3 "digital TFT-LCD 16: 9 aspect ratio
Pixels: 800 * RGB * 480/480 * RGB * 272
Signaling system: PAL / NTSC can be switched automatically
Operating power: DC 12 / 24V
Current consumption: 2W (max.)
Operating temperature: -20 to +70 ° C
Video signal: 1 V p-p 75 °
Turns on automatically when there is a video signal
Size: 117 x 85 x 20 mm
12 months warranty

Wire connection:

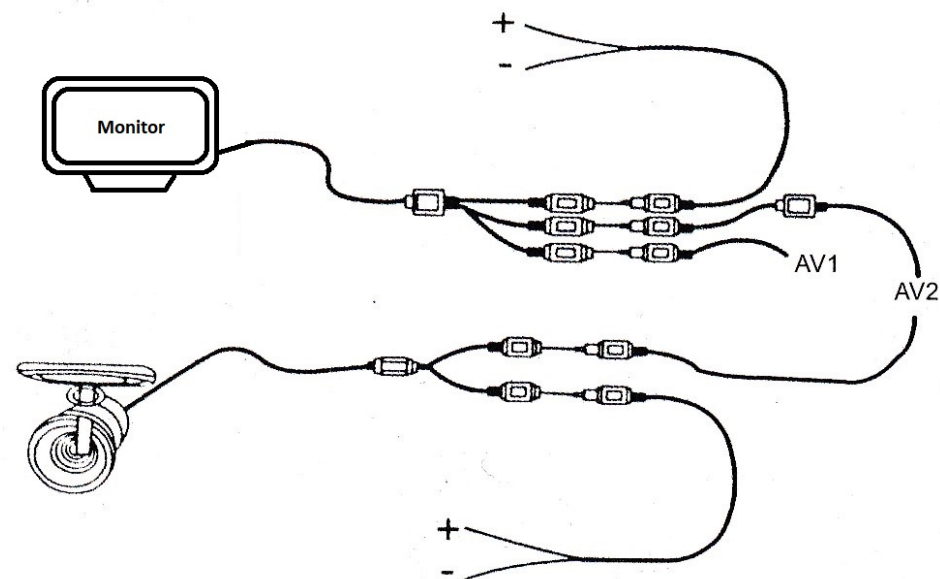

The warranty is conditional on installation by a specialist garage.

Importer;

S.M.Power Kft

2310 Szigetszentmiklós, Csepeli út 15

www.smpower.eu