


Instructions

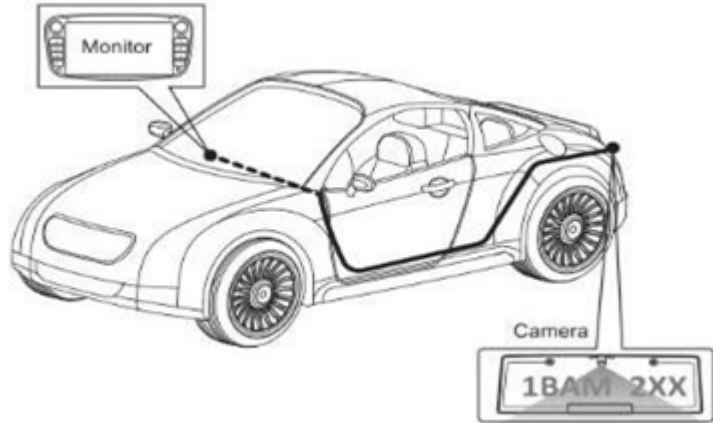

specific camera series integrated in license plate lighting.

., Original condition.


!, Remove the factory lighting, unplug the factory.

), Connect the camcorder, plug in the factory plug, insert the camcorder into the factory lighting location.


Depending on the type, it may be necessary to replace the factory bulb or the

complete lamp

1-5, Installed condition.

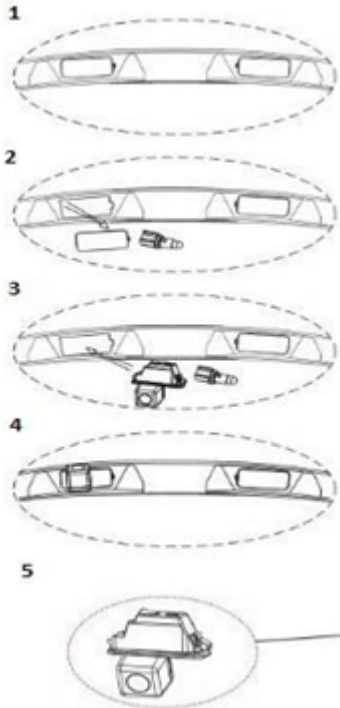

Wiring instructions

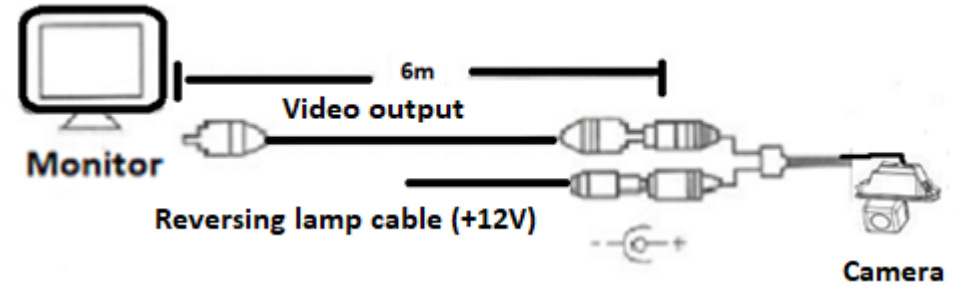

Technical features:

- Dimensions: 28.40 mm X 55.55 mm
- Operating voltage: 12V
- Viewing angle: 120 °
- Camera type: color CMOS
- System: NTSC / PAL
- Resolution: NTSC: 648x488 / PAL: 648x520
- Min. Brightness: 0.5Lux / F1.2
- Video output: RCA connector
- Operating temperature: -20 ° C ~ 70 ° C, RH95% max.
- Other features: automatic white balance adjustment

General troubleshooting;

If the image transmitted by the camera is grainy or not clear:

Can-bus signal can interfere with the operation of the camera, check the connections, if necessary use an isolating relay.

The warranty is conditional on a copy of the installation invoice from a specialist garage.

Importer;

S.M.Power Kft

2310 Szigetszentmiklós, Csepeli út 15

www.smpower.eu